


At the point of demarcation, Building Entrance Terminals, or BET's, safeguard communication equipment from damaging electrical surges that may get onto those incoming lines.

## FEATURES & BENEFITS

- UL 497 Listed for primary and secondary protection
- 66 input and output
- Also available with MS<sup>2</sup> or 710 input
- 25, 50 and 100-pair configurations available
- Manufactured from 18 gauge, epoxy powder coated steel
- Splice chamber for input termination
- Optional cover over protector and output field
- Uses industry standard 5-pin protector modules
- Available with factory installed protector modules
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

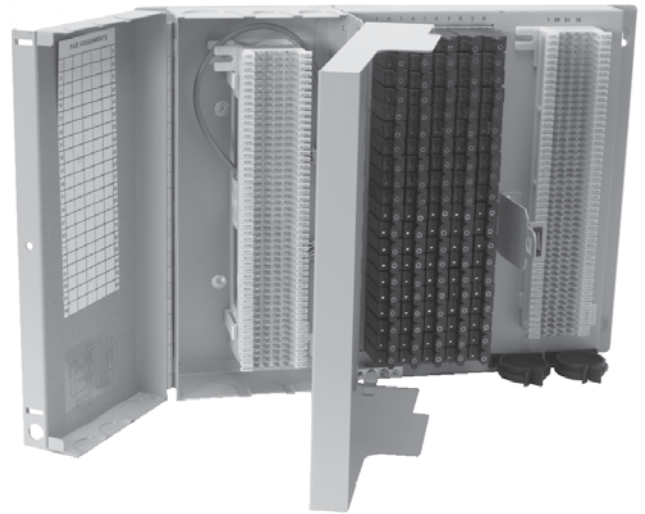


## ORDERING INFORMATION

Model#	Pair Count	Input	Output	Modules	Module Model#	Cover
24100-66-M66	100	66	66	None	NA	No
24100-66-M66P	100	66	66	230V Gas Tube	175BCXN-230	No
24100-66-M66C	100	66	66	None	NA	Yes
24100-66-M66PC	100	66	66	230V Gas Tube	175BCXN-230	Yes
24100-66-M66PS	100	66	66	240V Solid State	115SCN-240	No
24100-66-M66PCS	100	66	66	240V Solid State	115SCN-240	Yes

Contact customer service for MS<sup>2</sup> or 710 configurations

**MECHANICAL SPECIFICATIONS FOR 24100-66-M66 BUILDING ENTRANCE TERMINAL:**

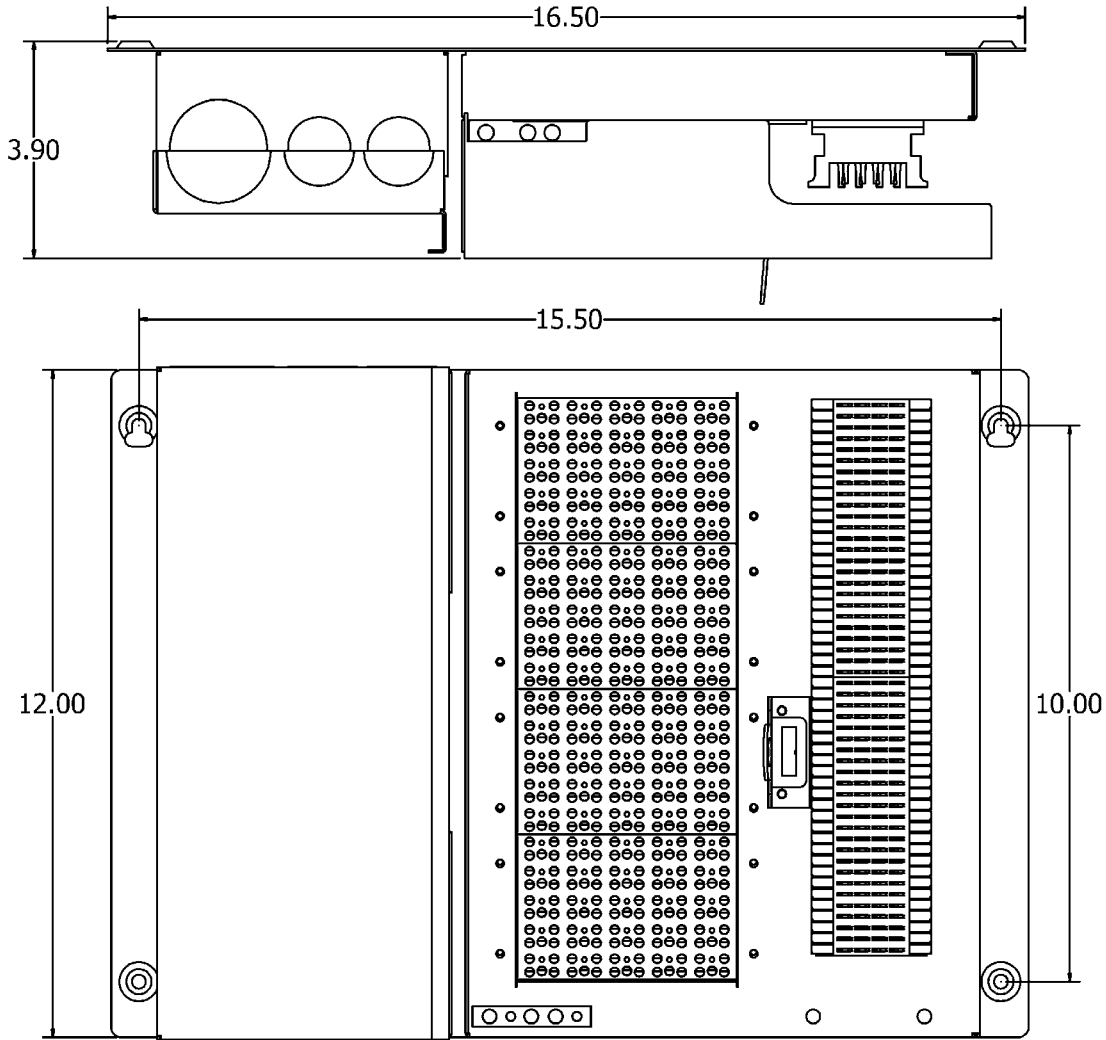

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
100 PAIR	12" x 16.5" x 4" (30.5 cm x 41.9 cm x 10.2 cm)	12 lbs.

\* Weight - Add approx 0.5 oz per installed module.



For more information contact:  
 6851 Jericho Turnpike, Suite 170  
 Syosset, NY 11791 USA  
 Tel. 1-516-364-9300 : Fx. 1.516.682.4636  
 sales@portasystems.com (Americas)  
 sales@portasystems.co.uk (Europe)